



# ANATOLOG

Technical datasheet

# ANATOLOG & ANATOLOG USB

AnatoLog measures different pressure spots between the skin and an orthopaedic medical device through wireless communication with its FSR sensors.


- Application for orthopaedics and podiatry
- 1 to 16 calibrated FSR sensors
- 1 compact stand-alone box with its USB dongle



# FSR MODULE

The AnatoLog system's sensors are Force-Sensing Resistor (FSR) type and can be placed under the foot (insoles), torso (corset), head (plagiocephaly helmet) and also on the amputated limb (prosthesis).

The measured values enable the real time optimization and validation of the design of medical devices.

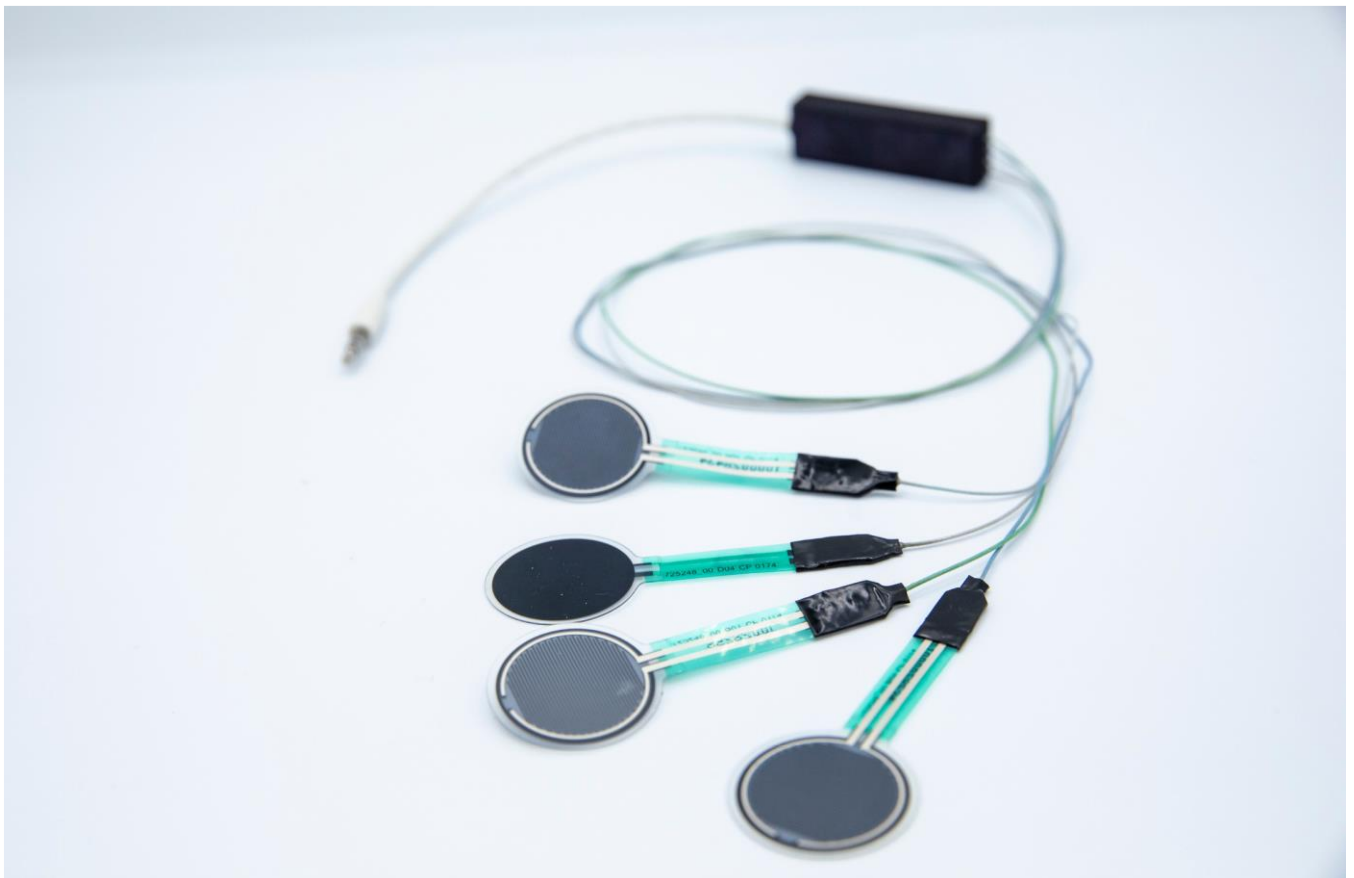

# ANATOLOG APPLICATION

AnatoLog Application is the software for the visualization (curves and gradient on 3D representation) of measured values by sensors.



# TECHNICAL FEATURES PAGE 4

## ANATOLOG & ANATOLOG USB

**Medical device with CE marking  
(Class I with a measuring function)**

**Communication type**

Wireless communication : 2.4 Ghz

**Acquisition frequency**

20 à 100 Hz

**Power**

Batterie XPOWER 603048

Lithium-ion polymère rechargeable

3.7V, 800 mAh, 2.96 Wh

**Type of charging cable**

Jack 2.35 – USB C, 5V

USB charge on medical computer with  
2 MOPP protection

**Usage time**

48h

**Dimensions (L x w x h)**

Anatolog : 80 x 40 x 27 mm

Anatolog USB : 71 x 22 x 11 mm

**Weight**

Anatolog : 75 g

Anatolog USB : 12 g

**Material**

Polyamide 12

Hypoallergenic

**Lifetime**

5 years

**Guarantee**

2 year

**Conditions of use and transportation**

Temperature : +10°C +25°C

Atmospheric pressure : 700 – 1060 hPa

Humidity : 30 à 75 %

Sensitive to physical and electric shocks.

Must not be exposed to water (IP10).

# TECHNICAL FEATURES

## FSR MODULE

### Sensor type

Force-Sensing Resistor : piezoresistive

### Nombre de capteurs

Per FSR module : 4

Usable with AnatoLog : 1 to 16

### Diameter of sensor active part

29 mm (1")

### Sensor thickness

0.4 mm

### Measuring range

FSR Module "High" : 0 à 200 kPa

FSR Module "Low" : 0 à 12 kPa

Accuracy :  $\pm 10\%$

### Dimensions (L x l x h)

FSR Module case : 57 x 18 x 11 mm

### Weight

Module FSR : 11 g

### Cable length

Cable of sensor : 500 mm

Jack cable : 185 mm

### Material

Case : Polyamide 12 Hypoallergenic

FSR Sensor : Non hypoallergenic

Medical barrier envelopes provided

### Jack cable type

Jack audio 3.5

### Conditions of use and transportation

Temperature : +10°C +25°C

Atmospheric pressure : 700 – 1060 hPa

Humidity : 30 à 75 %

Sensitive to physical and electric shocks.

Must not be exposed to water (IP10).

# ANATOSCOPE

## CONTACT

### **ADRESS**

AnatoScope  
40 rue de Pinville  
Le Mistral  
34000 Montpellier  
France

### **E-MAIL**

[contact@anatolog.com](mailto:contact@anatolog.com)

### **WEBSITE**

[anatolog.com](http://anatolog.com)